
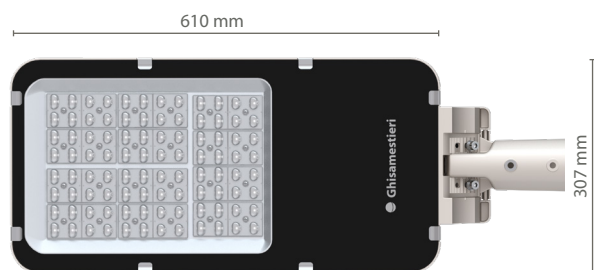


# Orn 600

Product code: OR6

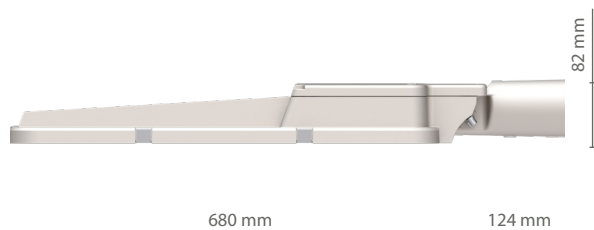

Scale: 1:5


## Max. weight

8,9 Kg


## CXS

Lateral: 0,05 m<sup>2</sup> | Plan: 0,18 m<sup>2</sup>

## FIXING TYPE

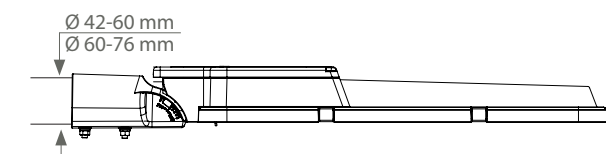

Adjustable with 5° step

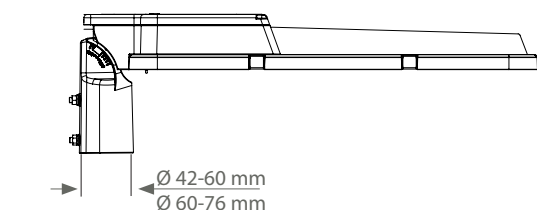

Adjustable with 5° step

## STANDARD

EN 60598-1, EN 60598-2-3, EN 62471, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3

## CONFORMITY | PROTECTION

### Conformity



### Salt spray test

ISO 9227



### Vibration test passed

IEC 60068-2-6



### Insulation classes



### Protection classes



### Photobiological safety



Classe 0  
Exempt group  
IEC/TR62778

## PLUS



CUTOFF



OPTICAL  
FLEXIBILITY



LOW GLARE



A++  
IPEA  
MIN



SEPARATE UNITS  
(ELECTRICAL AND OPTICAL)

## LIGHTING FIXTURE FEATURES

### General features

Power source:	220-240V   50/60Hz   tolerance +/-10%   other voltages on request
Current supply:	526 mA   700 mA   any more up to 1000 mA (P <sub>max</sub> = 206,1W)
Power Factor   THD:	≥0.95   <10 % (At full load)
Expected life (Ta=25°):	> 100.000 h   L90B10   @700mA
Operational temperature (Ta):	T <sub>min</sub> = -40°C T <sub>max</sub> = +55°C   700 mA +50°C   1000 mA
Storage temperature:	-40°C/+80°C
Overcharge protection:	Impulse withstand up to 10kV CM/DM

Standard functions:  
(Details pag.4)

Current fixed | Virtual midnight | CLO

## Materials

Lighting fixture:	Die cast aluminium   EN1706
Optical system:	Nano-optics in PMMA Aluminum reflector, 99.7% oxidised and polished purity
Screen:	Screen-printed ultraclear tempered glass   Th. 4mm
Gaskets:	Silicon
Cable gland:	Polyamide PA66   PG16   Ø 14mm MAX   IP 68
Screws and bolts:	AISI 304 stainless steel
Fixture color:	Light grey Ghisamestieri®

## LED FEATURES

LED data 4.000 K - 700mA:	340 lm/LED   180 lm/W   25°C [Tj]   ≤ 3 step macadam
Colour temperature:	3.000 K   4.000 K   5.700 K   CRI ≥ 70
"Flip chip LED" technology:	Hight performance and hight quality LED equipped with gold electrode; hight protection against corrosion and color shifting.


## OPTIONAL

Overcharge protection:	optional - SPD with warning LED CLASS 1   CLASS 2 10kV / 10kA CM/DM
Electrical equipment:	0,5 m power cable with 2-3 or 4-5 core connector Disconnecter and cable clamp   cross section 1.5mm <sup>2</sup> ÷ 4mm <sup>2</sup>
Optional functions:	1-10 V   DALI-DALI2   DALI SENSOR (Details pag.4)
Connectos and external sockets:	NM (Nema Socket )   LM (Lumawise Zhaga Socket) (Details pag.4)



### PEDESTRIAN PATHS\\ OPTIC TYPES 2

#### TYPE 2A




**Asymmetrical light,**  
designed to suit streets  
and pedestrian or cycle  
paths.




### URBAN AND SUBURBAN STREETS, SQUARES, PARKING LOTS AND ROUNDABOUTS\\ OPTIC TYPES 3

#### TYPE 3A




**Asymmetrical light,**  
designed to suit streets  
and road wet surface.

#### TYPE 3B




**Asymmetrical light,**  
designed to suit  
suburban and urban  
streets.

#### TYPE 3C




**Asymmetrical light,**  
designed to suit very lar-  
ge streets, parking lots  
and roundabouts.

#### TYPE 3D




**Asymmetrical light,**  
designed to suit streets  
and pedestrian paths.

#### TYPE 3E



**Asymmetrical light,**  
designed to suit very  
large streets, parking  
lots and roundabouts.

#### TYPE 3F




**Asymmetrical light,**  
designed to suit very large  
streets and road with a low in-  
stallation of the lighting fixture,  
parking lots and roundabouts.




### PEDESTRIAN CROSSINGS\\ OPTIC TYPES 4

#### TYPE 4A




**Asymmetrical light,**  
designed to suite  
installation to  
pedestrian crossings.

#### TYPE 4B



**Asymmetrical light,**  
designed to suite  
installation to  
pedestrian crossings.

### APPLICATION EXAMPLES \\\




TYPE 2A | TYPE 3D




TYPE 2A | TYPE 3D




TYPE 3A | TYPE 3B



TYPE 3C | TYPE 3E | TYPE 3F










TYPE 4A | TYPE 4B



TYPE 4A + TYPE 4B

The LED modules nominal data refers only to the LED light sources in a standard version, with 4000 K color temperature, color rendering index CRI 70 min. and a junction temperature  $t_j$  of 25°C.








The LED nominal data are extrapolated from the manufacturer documentations.

LED code		I [mA]	Luminous flux [lm]	Power [W]	Efficiency [lm/W]
GL12		525	12765	69,0	185
		700	16008	92,0	174
		1000	16500	100,0	165
GL14		525	14615	79,0	185
		700	18270	105,0	174
		1000	25080	152,0	165
GL16		525	17020	92,0	185
		700	21402	123,0	174
		1000	28336	176,0	161
GL18		525	18870	102,0	185
		700	23664	136,0	174
		900	28168	175,0	161
GL20		525	21090	114,0	185
		700	26274	151,0	174
		850	33432	199,0	168
GL22		525	23495	127,0	185
		700	29406	169,0	174
		800	34645	205,0	169
GL24		525	25715	139,0	185
		700	32190	185,0	174
		-	-	-	-

The lighting fixture measured data refers to GHISAMESTIERI products in a standard version, with 4000 K color temperature, optica type 3B and an ambient temperature  $t_a$  of 25 °C.

Ghisamestieri offers the possibility of driving the device with custom currents (\*).

To obtain luminous fluxes and efficiencies of the lighting fixture in case of optic type and/or color temperature and/or color rendering index different from the standard use the conversion factors shown in the tables.

Order code: OR6_GLxx		(*) I [mA]	Luminous flux [lm]	Power [W]	Efficiency [lm/W]
GL12		525	10735	76,0	141
		700	13687	101,0	136
		1000 (max)	18479	145,0	127
GL14		525	12524	88,5	142
		700	16081	118,0	136
		1000 (max)	21559	169,0	128
GL16		525	14313	101,5	141
		700	18249	133,0	137
		1000 (max)	24461	192,5	127
GL18		525	15880	112,0	142
		700	20385	149,0	137
		1000 (max)	27320	216,0	126
GL20		525	17644	123,0	143
		700	22489	165,0	136
		850 (max)	26160	200,5	130
GL22		525	19137	134,0	143
		700	24561	181,0	136
		800 (max)	27076	206,1	131
GL24		525	20729	146,0	142
		700 (max)	26600	196,5	135

### OPTIC CONVERSION FACTOR LUMINOUS FLUX

Optic type	Flux multiplier
1A (*)	1,00
2A (*)	0,99
3A   3C   3D   3E   3F	0,99
4A   4B	0,98
5A (*)	1,01

### Tk CONVERSION FACTOR LUMINOUS FLUX

Tk [K]	Flux multiplier
2.200 (**)	0,70
3.000	0,94
5.700	1,01

### CRI CONVERSION FACTOR LUMINOUS FLUX

CRI (color render index)	Flux multiplier
70	1,00
80	0,93

(\*) See pag.2 to check the optic type availability.

(\*\*) See pag.1 to check the colour temperature availability.

## Functions

### Standard functions

#### Fixed Output

The lighting fixture is set to use a fixed current among the standard ones indicated in the tables on page 3. It is possible to set other currents on customer request (custom).

#### Virtual midnight | Automatic lighting control

The driver is programmed to automatically switch the light On or Off based on the time of the day ensuring high energy saving. The maximum output is usually set during the first and last hours of operation that statistically are proven to have higher traffic, it will then decrease during the middle hours when there is less traffic.

The system is able to automatically regulate itself, identifying the average between the instant it turns on and turns off. This is called "virtual midnight" and is the reference point for reducing the light emission based on the desired profile.

The output will automatically adapt to the length of the night throughout the year.

#### CLO | Costant lumen output

Considering LED performance deteriorates with use and time, it may be compensated by using a lower than maximum flux output and maintaining it constant in time by progressively increasing the current.

In this case maintenance and management costs of the systems are considerably lower.

### Optional functions

#### 1-10V | Flux control by analogic control

It is possible to adjust the amount of luminous output by means of an analog input signal that has a minimum level of 1V and maximum of 10V. The device is fitted with L-N-1 / 10V cable connection.

#### DALI - DALI2 | Controllo e programmazione digitale

On request, the lighting body can be supplied with a DALI interface. The DALI system allows a lighting system to be controlled by providing control and diagnostic functions.

#### DALI SENSOR

With the DALI SENSOR interface it is possible to manage the functions of the DALI - DALI2 protocol. In addition, there is a low voltage AUX switch to manage remote control systems and external sensors in a Smart City perspective.


### External connectors and sockets on request

#### NM | Nema Socket (7 PIN)


The Nema Socket 7 PIN is a connector / socket that is mounted in the lighting body and allows access to the driver programming functions from the outside. The remote control system, which can be installed via this external connector, can also be implemented in a phase subsequent to commissioning the system. If the system is not used immediately, the socket is equipped with an IP66 closing cap and a short-circuit system for the power supply by-pass. Various telecontrol technologies can be used, both radio wave and conveyed wave, which can interface both to the 1-10V and DALI ports.

#### LM | Lumawise Zhaga Socket (4 PIN)


The Lumawise Zhaga Socket 4 PIN is a connector / socket equivalent to the Nema Socket 7 PIN but smaller and more compact and uses the Zhaga standard. Through this connector it is possible from the outside of the device to integrate driver management and programming systems and other "smart" functions such as various sensors. Also this device can only be prepared and not used immediately, therefore it is provided with its IP66 protection cap. (In conjunction with DALI SENSOR).

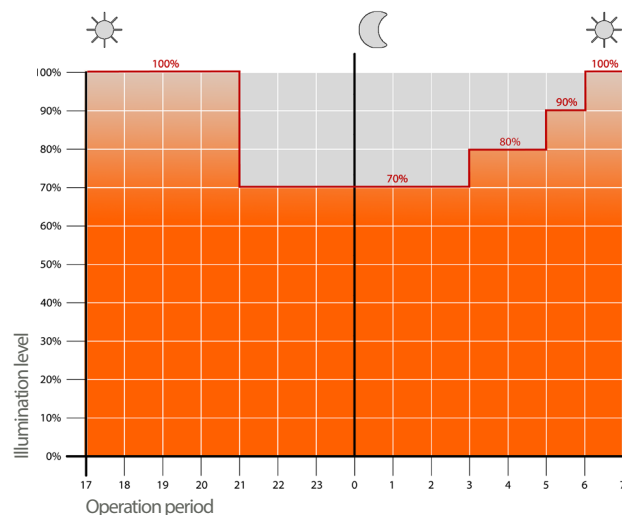


Example of 4-step adjustment with virtual midnight

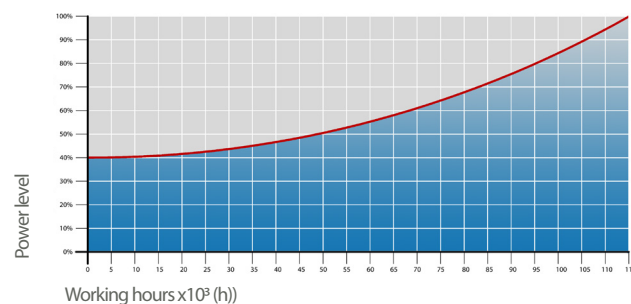

CLO | Costant lumen output

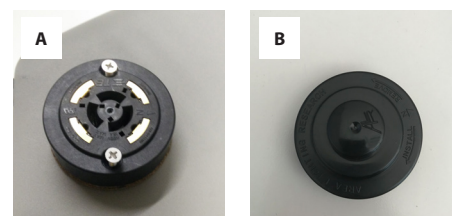

Nema Socket 7 PIN (A) and IP66 closing cup (B)

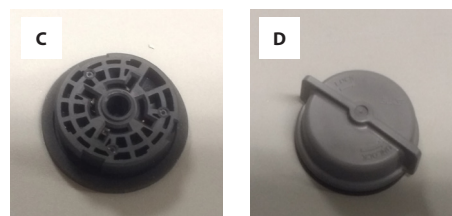

Lumawise Zhaga Socket 4 PIN (C) and IP66 closing cup (D)

## Protection cycles

Ghisamestieri works with cast iron, steel and aluminum. The materials are selected and processed to maximize performance and quality.

### GALVANIZED STEEL

#### Protection of galvanized steel surfaces for poles

The protection of galvanized steel elements is achieved by following steps:

- Micro sandblasting;
- First epoxy layer application followed by:  
Wilting > Drying > Cooling;
- Acrylic glaze layer application followed by:  
Wilting > Drying > Cooling;
- Packing at least after 24-hour-drying at room temperature.

#### Protection of galvanized steel surfaces for brackets and pastorals

The protection of the galvanized steel elements is achieved thanks to:

- Micro sandblasting;
- Phosphoric pickling bath at a ph level ranging from 1.5 to 3;
- Rinsing with demineralised water;
- First powder layer application;
- Kiln firing;
- Application of a final powder layer;
- Kiln roasting of the final powder layer at 180°;
- Cooling.

### CAST IRON

#### Protection of cast iron surfaces for bases

The protection of cast iron elements is achieved by the following treatments:

- Surface micro shotblasting;
- Mono-component dip galvanizing followed by:  
Wilting > Drying > Cooling;
- Epoxy micaceous primer application followed by:  
Wilting > Drying > Cooling;
- Acrylic enamel application followed by:  
Wilting > Drying > Cooling;
- Packing at least after 24-hour-drying at room temperature.

### DIE-CAST ALUMINIUM

#### Protection of die-cast aluminium surfaces for lighting fixtures, tops, collars, brackets and pastorals

Brackets, pastoral, and die-cast accessories undergo a cycle of powder painting which creates a barrier against the corrosion of metal parts. Moreover this barrier makes the finished product comply with design specifications in terms of surface roughness, color and reflectance. The cycle consists of the following steps:

- Micro sandblasting;
- Hot pickling bath in a zinc-based phosphodegreasing solution;
- Specific process for the preparation of surfaces before painting;
- Washing with water;
- Rinsing with demineralised water and subsequent drying;
- First powder layer application followed by kiln baking at 180°;
- Final powder layer application using a High Durability product and final kiln roasting at 180°C.



**Salt spray test | FLORIDA TEST**

The top quality of such treatments is confirmed by salt spray tests performed in accordance with standard ISO 9227:2017 Neutral Salt Spray test (NSS).

The test was carried out for 8.000 hours at 35 °C and demonstrated through the report test released.



**Ghisamestieri the green way of light s.r.l**

Legal headquarters:  
Strada Provinciale Specchia - Alessano, 68 • 73040 (LE)

Administrative and operational headquarters:  
Via Grande n°226 • 47032 Bertinoro (FC)

T +39 0543 462611  
F +39 0543 449111

**info@ghisamestieri.it**  
**www.ghisamestieri.it**