

Virgo A 400


Product code: VA4

Ghisamestieri
the green way of light

lightecture: Virgo | rev. 2019.10.08



126 mm

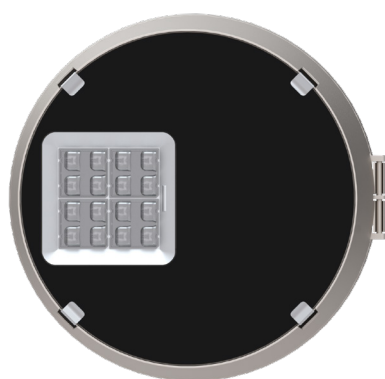

368 mm

Scale: 1:5

Max. weight

5,0 Kg
fixing device excluded

CXS


Lateral: 0,03 m² | Plan: 0,11 m²

FIXING TYPE




Suspended

Standard: fast connection
On request: Ø ¾" Gas



Wire system



STANDARD

EN 60598-1, EN 60598-2-3, EN 62471, EN 55015, EN 61547, EN 61000-3-2, EN 61000-3-3

CONFORMITY | PROTECTION

Conformity



Salt spray test

ISO 9227



8000 hr

Vibration test passed

IEC 60068-2-6



Insulation classes



Protection classes



Photobiological safety



Classe 0
Exempt group
IEC/TR62778

PLUS



CUTOFF



OPTICAL
FLEXIBILITY



LOW GLARE



A++
IPEA
MIN

LIGHTING FIXTURE FEATURES

General features

Power source:	220-240V 50/60Hz tolerance +/-10% other voltages on request
Current supply:	525 mA 700 mA 1000 mA (P _{max} = 51,0W)
Power Factor THD:	≥0.95 <10 % (At full load)
Expected life (Ta=25°):	> 100.000 h L90B10 @700mA
Operational temperature (Ta):	T _{min} = -40°C T _{max} = +55°C 700 mA +50°C 1000 mA
Storage temperature:	-40°C/+80°C
Overcharge protection:	Impulse withstand up to 10kV CM/DM

Standard functions:
(Details pag.4)

Current fixed | Virtual midnight | CLO

Materials

Lighting fixture:	Die cast aluminium EN1706
Optical system:	Nano-optics in PMMA Aluminum reflector, 99.7% oxidised and polished purity
Screen:	Screen-printed ultraclear tempered glass Th. 4mm
Gaskets:	Silicon
Cable gland:	Polyamide PA66 PG16 Ø 14mm MAX IP 68
Screws and bolts:	AISI 304 stainless steel
Fixture color:	Light grey Ghisamestieri®

LED FEATURES

LED data 4.000 K - 700mA:	340 lm/LED 180 lm/W 25°C [Tj] ≤ 3 step macadam
Colour temperature:	2.200K 3.000 K 4.000 K 5.700 K CRI ≥ 70
"Flip chip LED" technology:	Hight performance and hight quality LED equipped with gold electrode; hight protection against corrosion and color shifting.

OPTIONAL

Overcharge protection:	optional - SPD with warning LED CLASS 1 CLASS 2 10kV / 10kA CM/DM
Electrical equipment:	0,5 m power cable with 2-3 or 4-5 core connector Disconnecter and cable clamp cross section 1.5mm ² ÷ 4mm ²
Optional functions:	1-10 V DALI-DALI2 DALI SENSOR (Details pag.4)
Connectos and external sockets:	NM (Nema Socket) LM (Lumawise Zhaga Socket) (Details pag.4)

Virgo A 400

Available optical system




Ghisamestieri
the green way of light

lightecture: Virgo | rev. 2019.10.08



STREET-CENTRE\\ OPTIC TYPES 1

TYPE 1A




Symmetrical light, designed to be installed in the middle of the street.




URBAN AND SUBURBAN STREETS, SQUARES, PARKING LOTS AND ROUNDABOUTS\\ OPTIC TYPES 3

TYPE 3A




Asymmetrical light, designed to suit streets and road wet surface.

TYPE 3B




Asymmetrical light, designed to suit suburban and urban streets.

TYPE 3C




Asymmetrical light, designed to suit very large streets, parking lots and roundabouts.

TYPE 3D




Asymmetrical light, designed to suit streets and pedestrian paths.

TYPE 3E



Asymmetrical light, designed to suit very large streets, parking lots and roundabouts.

TYPE 3F




Asymmetrical light, designed to suit very large streets and road with a low installation of the lighting fixture, parking lots and roundabouts.




PEDESTRIAN CROSSINGS\\ OPTIC TYPES 4

TYPE 4A



Asymmetrical light, designed to suite installation to pedestrian crossings.

TYPE 4B




Asymmetrical light, designed to suite installation to pedestrian crossings.



PARKS AND SQUARES\\ OPTIC TYPES 5

TYPE 5A



Symmetrical light, designed to be installed in parks, squares, parking lots and other large surfaces.

APPLICATION EXAMPLES\\



TYPE 1A




TYPE 2A | TYPE 3D




TYPE 2A | TYPE 3D




TYPE 3A | TYPE 3B



TYPE 3C | TYPE 3E | TYPE 3F



TYPE 5A





TYPE 4A | TYPE 4B



TYPE 4A + TYPE 4B

The LED modules nominal data refers only to the LED light sources in a standard version, with 4000 K color temperature, color rendering index CRI 70 min. and a junction temperature t_j of 25°C.



The LED nominal data are extrapolated from the manufacturer documentations.

LED code		I [mA]	Luminous flux [lm]	Power [W]	Efficiency [lm/W]
GL02		525	2220	12,0	185
		700	2610	15,0	174
		1000	3542	22,0	161
GL04		525	4255	23,0	185
		700	5394	31,0	174
		1000	7084	44,0	161

The lighting fixture measured data refers to GHISAMESTIERI products in a standard version, with 4000 K color temperature, optica type 3B and an ambient temperature t_a of 25 °C.

Ghisamestieri offers the possibility of driving the device with custom currents (*).

To obtain luminous fluxes and efficiencies of the lighting fixture in case of optic type and/or color temperature and/or color rendering index different from the standard use the conversion factors shown in the tables.

Order code: VA4_GLxx	(*) I [mA]	Luminous flux [lm]	Power [W]	Efficiency [lm/W]
GL02 	525	1901	14,5	131
	700	2459	19,0	129
	1000 (max)	3345	27,0	124
GL04 	525	3751	27,0	139
	700	4851	36,0	135
	1000 (max)	6507	51,0	128

OPTIC CONVERSION FACTOR LUMINOUS FLUX

Optic type	Flux multiplier
1A (*)	1,00
2A (*)	0,99
3A 3C 3D 3E 3F	0,99
4A 4B	0,98
5A (*)	1,01

Tk CONVERSION FACTOR LUMINOUS FLUX

Tk [K]	Flux multiplier
2.200 (**)	0,70
3.000	0,94
5.700	1,01

CRI CONVERSION FACTOR LUMINOUS FLUX

CRI (color render index)	Flux multiplier
70	1,00
80	0,93

(*) See pag.2 to check the optic type availability.

(**) See pag.1 to check the colour temperature availability.

Functions

Standard functions

Fixed Output

The lighting fixture is set to use a fixed current among the standard ones indicated in the tables on page 3. It is possible to set other currents on customer request (custom).

Virtual midnight | Automatic lighting control

The driver is programmed to automatically switch the light On or Off based on the time of the day ensuring high energy saving. The maximum output is usually set during the first and last hours of operation that statistically are proven to have higher traffic, it will then decrease during the middle hours when there is less traffic. The system is able to automatically regulate itself, identifying the average between the instant it turns on and turns off. This is called "virtual midnight" and is the reference point for reducing the light emission based on the desired profile. The output will automatically adapt to the length of the night throughout the year.

CLO | Costant lumen output

Considering LED performance deteriorates with use and time, it may be compensated by using a lower than maximum flux output and maintaining it constant in time by progressively increasing the current. In this case maintenance and management costs of the systems are considerably lower.

Optional functions

1-10V | Flux control by analogic control

It is possible to adjust the amount of luminous output by means of an analog input signal that has a minimum level of 1V and maximum of 10V. The device is fitted with L-N-1 / 10V cable connection.

DALI - DALI2 | Controllo e programmazione digitale

On request, the lighting body can be supplied with a DALI interface. The DALI system allows a lighting system to be controlled by providing control and diagnostic functions.

DALI SENSOR

With the DALI SENSOR interface it is possible to manage the functions of the DALI - DALI2 protocol. In addition, there is a low voltage AUX switch to manage remote control systems and external sensors in a Smart City perspective.


External connectors and sockets on request

NM | Nema Socket (7 PIN)


The Nema Socket 7 PIN is a connector / socket that is mounted in the lighting body and allows access to the driver programming functions from the outside. The remote control system, which can be installed via this external connector, can also be implemented in a phase subsequent to commissioning the system. If the system is not used immediately, the socket is equipped with an IP66 closing cap and a short-circuit system for the power supply by-pass. Various telecontrol technologies can be used, both radio wave and conveyed wave, which can interface both to the 1-10V and DALI ports.

LM | Lumawise Zhaga Socket (4 PIN)


The Lumawise Zhaga Socket 4 PIN is a connector / socket equivalent to the Nema Socket 7 PIN but smaller and more compact and uses the Zhaga standard. Through this connector it is possible from the outside of the device to integrate driver management and programming systems and other "smart" functions such as various sensors. Also this device can only be prepared and not used immediately, therefore it is provided with its IP66 protection cap. (In conjunction with DALI SENSOR).

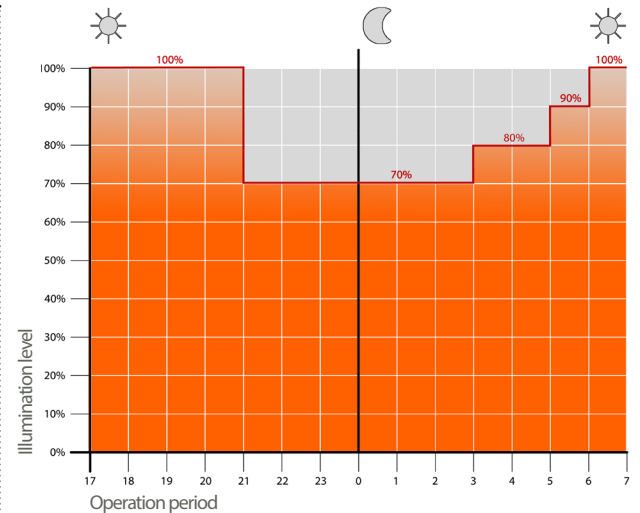


Example of 4-step adjustment with virtual midnight

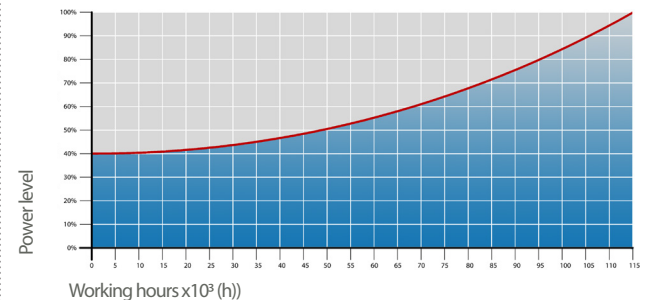

CLO | Costant lumen output

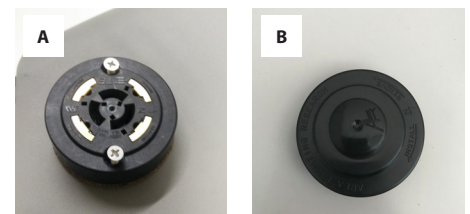

Nema Socket 7 PIN (A) and IP66 closing cup (B)

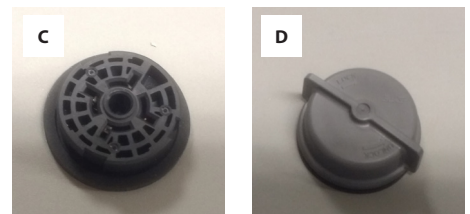

Lumawise Zhaga Socket 4 PIN (C) and IP66 closing cup (D)

Protection cycles

Ghisamestieri works with cast iron, steel and aluminum. The materials are selected and processed to maximize performance and quality.

GALVANIZED STEEL

Protection of galvanized steel surfaces for poles

The protection of galvanized steel elements is achieved by following steps:

- Micro sandblasting;
- First epoxy layer application followed by:
Wilting > Drying > Cooling;
- Acrylic glaze layer application followed by:
Wilting > Drying > Cooling;
- Packing at least after 24-hour-drying at room temperature.

Protection of galvanized steel surfaces for brackets and pastorals

The protection of the galvanized steel elements is achieved thanks to:

- Micro sandblasting;
- Phosphoric pickling bath at a ph level ranging from 1.5 to 3;
- Rinsing with demineralised water;
- First powder layer application;
- Kiln firing;
- Application of a final powder layer;
- Kiln roasting of the final powder layer at 180°;
- Cooling.

CAST IRON

Protection of cast iron surfaces for bases

The protection of cast iron elements is achieved by the following treatments:

- Surface micro shotblasting;
- Mono-component dip galvanizing followed by:
Wilting > Drying > Cooling;
- Epoxy micaceous primer application followed by:
Wilting > Drying > Cooling;
- Acrylic enamel application followed by:
Wilting > Drying > Cooling;
- Packing at least after 24-hour-drying at room temperature.

DIE-CAST ALUMINIUM

Protection of die-cast aluminium surfaces for lighting fixtures, tops, collars, brackets and pastorals

Brackets, pastoral, and die-cast accessories undergo a cycle of powder painting which creates a barrier against the corrosion of metal parts. Moreover this barrier makes the finished product comply with design specifications in terms of surface roughness, color and reflectance. The cycle consists of the following steps:

- Micro sandblasting;
- Hot pickling bath in a zinc-based phosphodegreasing solution;
- Specific process for the preparation of surfaces before painting;
- Washing with water;
- Rinsing with demineralised water and subsequent drying;
- First powder layer application followed by kiln baking at 180°;
- Final powder layer application using a High Durability product and final kiln roasting at 180°C.



Salt spray test | FLORIDA TEST

The top quality of such treatments is confirmed by salt spray tests performed in accordance with standard ISO 9227:2017 Neutral Salt Spray test (NSS).

The test was carried out for 8.000 hours at 35 °C and demonstrated through the report test released.



Ghisamestieri the green way of light s.r.l

Legal headquarters:
Strada Provinciale Specchia - Alessano, 68 • 73040 (LE)

Administrative and operational headquarters:
Via Grande n°226 • 47032 Bertinoro (FC)

T +39 0543 462611
F +39 0543 449111

info@ghisamestieri.it
www.ghisamestieri.it