


Model	Wattage (W)	Voltage (V)	Current (mA)	Lumens (lm)	Cap	Ra	Color Temperature (K)	A or B (mm)	C or D (mm)	D1 (mm)	Lifespan (H)
T5C Circular Tubes	22	60	300	1350/1250	Gz10q	82	2700-6500	152	186	16	15000
	28	72	360	1850/1700	Gz10q	82	2700-6500	200	233	16	15000
	32	78	360	2200/2050	Gz10q	82	2700-6500	212	244	16	15000
	40	80	400	2550/2420	Gz10q	82	2700-6500	242	275	16	15000
	40	90	400	2650/2500	Gz10q	82	2700-6500	266	299	16	15000
	48	122	400	3750/3350	Gz10q	82	2700-6500	366	399	16	15000
	55	102	400	3300/3050	Gz10q	82	2700-6500	287	319	16	15000
	22	61	300	1400/1280	Gz10q	82	2700-6500	152	190	16	15000
T6C Circular Tubes	30	68	360	1800/1650	G10q	82	2700-6500	186	224	16	15000
	40	85	400	2450/2150	G11q	82	2700-6500	241	280	16	15000
	55	94	400	2800/2600	G12q	82	2700-6500	378	317	16	15000



Model	Wattage (W)	Voltage (V)	Current (mA)	Lumens (lm)	Cap	Ra	Color Temperature (K)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Lifespan (H)	
2D	10	72	180	630/590	GR10q	82	2700-6500	95	95	34.5	14	34.2	38.2	28.5	29.5	12000
	16	103	195	1050/960	GR8/GR10q	82	2700-6500	138	141	27.5	15	41	40	49	51	12000
	21	102	260	1380/1270	GR10q	82	2700-6500									12000
	28	106	320	2050/1850	GR8/GR10q	82	2700-6500	205	207	33	24	41	49	74	77	12000
	38	110	430	2800/2600	GR10q	82	2700-6500									12000
	55	78	700	3800/3650	GRY10q-3	82	2700-6500									12000

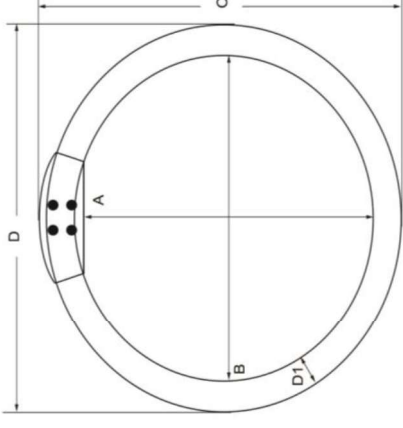